

# OPTO® Mehrbereichsblindniet



Aluminium  Stahl verzinkt 

Flachkopf | offen











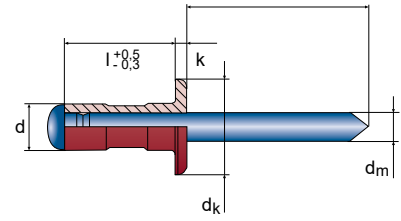




CAD  
DATEN  
ONLINE

Serie  
**600**



EN AW-5052 [AlMg2,5]

d	l <sup>+1</sup>		Nr.		
<b>3,2</b>	6,8	0,8 - 3,4	10600032068	500	
	8,0	0,8 - 4,8	10600032080	500	
	9,5	1,2 - 6,4	10600032095	500	
	11,0	4,0 - 7,9	10600032110	500	
<b>dk</b> 6,4	<b>dm</b> 1,8	<b>k</b> 1,0	 3,3 mm	 720 N	 1000 N
<b>4,0</b>	6,0	0,5 - 3,0	10600040060	500	
	9,5	1,2 - 6,4	10600040095	500	
	12,7	4,0 - 9,5	10600040127	500	
	16,9	6,4 - 12,7	10600040169	500	
<b>dk</b> 7,9	<b>dm</b> 2,3	<b>k</b> 1,2	 4,1 mm	 1120 N	 1650 N

d	l <sup>+1</sup>		Nr.		
<b>4,8</b>	10,3	1,6 - 6,4	10600048103	500	
	15,1	4,8 - 11,1	10600048151	500	
	16,9	6,4 - 12,7	10600048169	500	
	20,0	10,0 - 16,0	10600048200	500	
	24,8	12,7 - 19,8	10600048248	500	
	30,0	19,0 - 24,0	10600048300	500	
<b>dk</b> 9,8	<b>dm</b> 2,8	<b>k</b> 1,5	 4,9 mm	 1530 N	 2300 N